



# RVS-659


## FLUSH MOUNT BACKUP CAMERA (FMVSS 111 COMPLIANT)

FMVSS 111 regulates a necessary view behind a vehicle. The rule impacts vehicles with a gross vehicle weight rating (GVWR) of under 10,000 pounds, with phase-in effective by May 2017 and full compliance required by May 1st, 2018. The Flush-mount Backup Camera is about 1.43" in diameter and mounts flush in the back of a vehicle. Simply drill a 1.02" hole at the rear of your vehicle with the included hole saw and the camera will mount perfectly in that space for a clean install. This camera will make your vehicle compliant with the FMVSS 111 viewing requirement. Comes complete with 700 TV Lines and a 170° viewing angle.

Note: Camera must be installed between 5"-96" off the ground in order to be compliant with FMVSS 111



### CONNECTION DIAGRAM

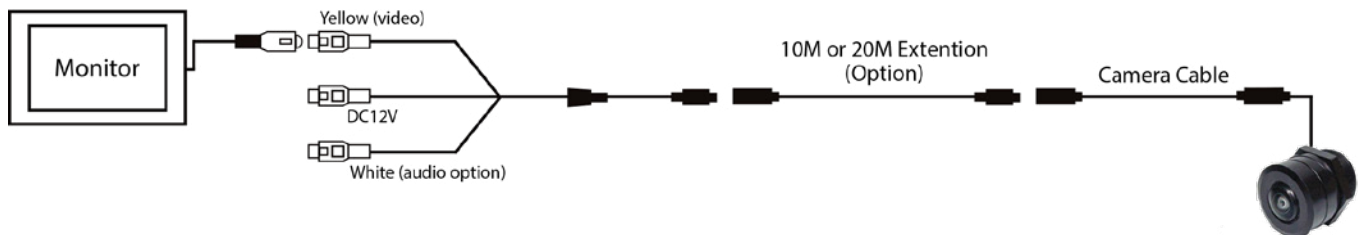

### SPECIFICATIONS

Sensor	1/3 PC1099
Active Array	960 X 480
Viewing Angle	170°
Waterproof Rating	IP68
Resolution	700 TV Lines
Minimum Light	0.5 Lux
AGC	Auto
BLC	Auto
S/N Ratio	More than 48dB
Video Output	1Vp-p 75Ω
Voltage	DC12V
Operating Temperature	-40 ~ +70 °C