

BACKUP CAMERA SYSTEM WITH TRAILER TOW QUICK CONNECT KIT RVS-770613-214

**REAR VIEW
SAFETY**
A Safe Fleet Brand




This backup camera system is perfect for the fifth wheel application. The system is complete with a crystal clear 7" TFT LCD DIGITAL COLOR monitor with mirror image capability and distance grid lines, a 3 channel multiplexer with automatic system switch, one 130° CCD camera with 50 foot infra-red night vision and all the wires, connectors and mounts you will need. The quick connect/disconnect cabling runs 26' through the tow vehicle, has a 12' pigtail cable to go between the vehicles and then a one foot connection on the trailer end to connect to the camera cable that runs through the trailer. The system is strong and reliable with a camera that boasts an IP69K waterproof rating and a 20G vibration and 100G impact rating (highest in the industry). It comes with a full year warranty.

BACKUP CAMERA SYSTEM WITH TRAILER TOW QUICK CONNECT KIT RVS-770613-214



- COMPLETELY WEATHERPROOF WITH AN IP69K RATING
- 7" DIGITAL TFT LCD COLOR MONITOR WITH REMOVABLE SUNSHADE
- 2.1 MM COLOR CCD CAMERA WITH A 130° VIEWING ANGLE
- 3 CHANNEL SYSTEM ALLOWING YOU TO CONNECT ADDITIONAL CAMERAS
- SHOCK RESISTANT WITH A 20G VIBRATION AND 100G IMPACT RATING

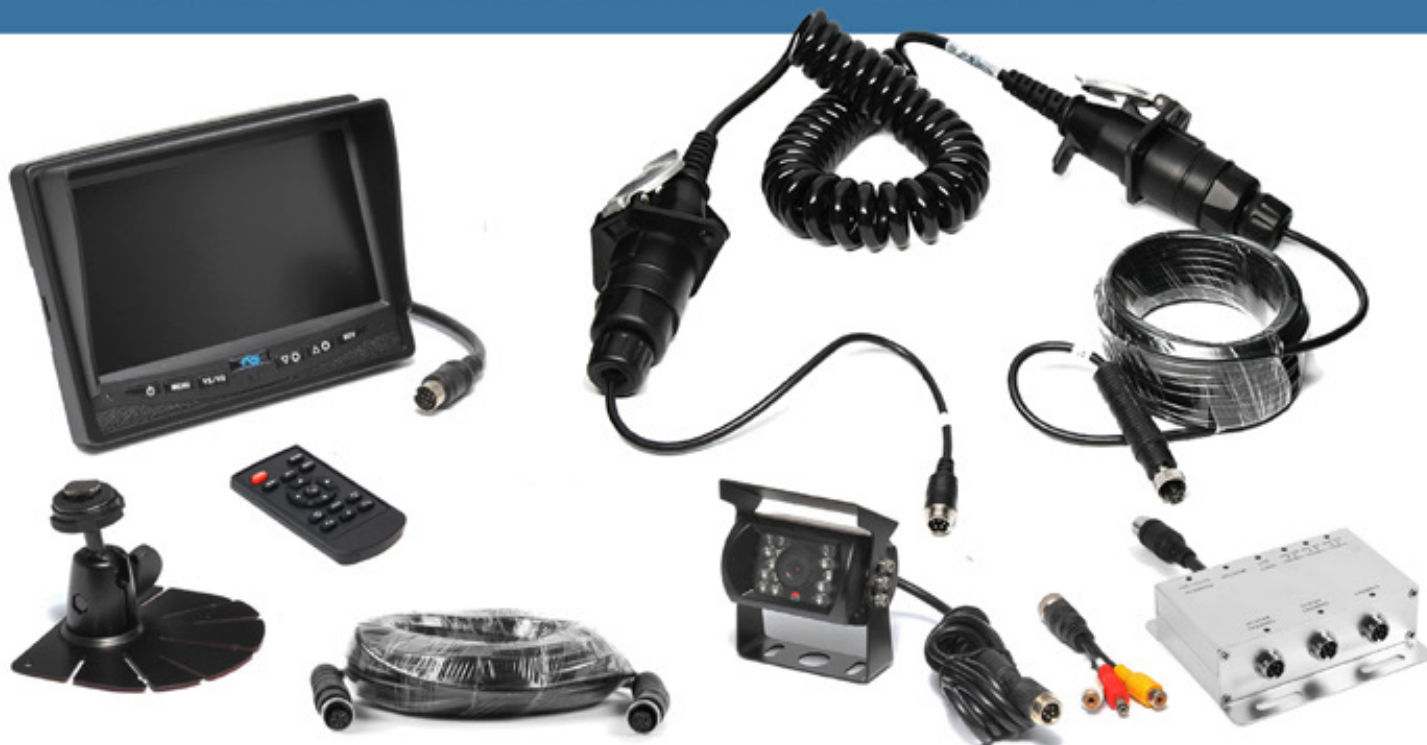

MONITOR

MONITOR TYPE	TFT LCD
SCREEN SIZE	7"
DOT RESOLUTION	800 X 3 (RGB) X 480
DISPLAY FORMAT/CONTRAST	16:9 / 500:1
DISPLAY BRIGHTNESS	400CD/m ²
VIEWING ANGLE	U:50° D:60° L/R:70°
VIDEO INPUT	3 CHANNEL
VIDEO SOURCE	1VP-P, 75Ω
POWER SUPPLY	DC 12V-24V (+/- 10%)
POWER CONSUMPTION	5W
OPERATING TEMPERATURE	-30°C ~ +80° C
VIDEO SYSTEM	AUTO NTSC/PAL
OVERALL DIMENSIONS	7" (L) X 5" (H) X 1" (D)
WEIGHT	400G
VIBRATION RATING	5G
DOT PITCH	0.192 (H) X 0.1805 (V)
SYNC SYSTEM	INTERNAL

CAMERA

SENSOR	1/4" SHARP® COLOR CCD
PICTURE ELEMENTS	250,000 PIXELS
GAMMA CORRECTION	R=0.45 TO 1.0
IMAGE SENSOR	600 TV LINES, PAL: 500 (H) X 582 (V), NTSC: 510 (H) X 92 (V)
LENS	2.1MM
VIEW ANGLE	130°
WATERPROOF RATING	IP69K
SYNC SYSTEM	INTERNAL SYNCHRONIZATION
INFRA-RED DISTANCE	50 FEET (18 INFRARED)
USABLE ILLUMINATION	0 LUX (IR ON)
POWER SOURCE	DC 12V-24V (+/- 10%)
S/N RATIO	MORE THAN 48DB
ELECTRONIC IRIS	1/50, 160-1/100,000SEC
VIDEO OUTPUT	1VP - P, 75 Ω
IR SWITCH CONTROL	ACDS AUTOMATIC CONTROL
VIBRATION AND IMPACT RATING	20G / 100G
OPERATING TEMPERATURE	-40°C ~ +80°C / RH 95% MAX
STORAGE TEMPERATURE	-40°C ~ +60°C / RH 95% MAX
NET WEIGHT	220Z